

Description

The InsulFast™ Drill Anchor is a light duty, impact set, interference fit anchor, designed for fixing the majority of insulation materials to solid substrates such as concrete, brick, block and stone.

Specification

Material	Polypropylene
Temperature Range	-30°C to + 80°C
Head Style	Disc
Fixing Method	Through Fixture
Setting Method	Impact
Anchoring Method	Interference Fit
Drilled Hole Diameter	8mm
Anchor Lengths	95mm, 115mm, 135mm
Min/Max Insulation Thickness'	50/60mm, 70/80mm, 90/100mm
Indicative Tensile Loads	Concrete - 10kg Solid Brick - 8kg Stone/Solid Block - 6kg
Substrates	Stone, Concrete, Solid Brick, Solid Block



Features & Benefits

- The InsulFast™ Drill Anchor is quick and easy to install through insulation.
- Although best suited to rigid insulation, such as extruded polystyrene, the anchor's large 90mm diameter head allows secure fixing of a variety of insulation materials.
- Made of polypropylene, the InsulFast™ Drill Anchor is suited to a wide temperature range of between -30°C to + 80°C

Related Products

DynaDrill™ / Hammer Drill Driver
Carbide Drill Bits


Trades & Applications

Insulation Fixing


Insulation Contractor



Compatible Insulation Types



Extruded Polystyrene



Fibreglass / Rockwool
 (Compatibility dependent on ability
 to drill through insulation)




Expanded Polystyrene

Specialised Anchors

Installation

1. Drill an 8mm hole through the insulation and a further 45mm into the substrate.
2. Insert the anchor through the insulation and into the pre-drilled hole.
3. Using light hammer blows, drive the anchor into the hole until the head of the anchor is in contact with the insulation and the insulation is firmly held against the substrate.

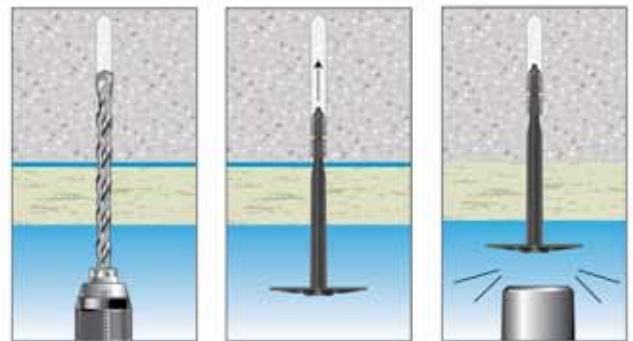

InsulFast™ Drill Anchor

Part No	Min./Max. Insulation Thickness (mm)	Overall Anchor Length (mm)	Drilled Hole Ø (mm)	Min Hole Depth (mm)	Order Qty
CB5060	50/60	95	8	45	200
CB7080	70/80	115	8	45	200
CB90100	90/100	135	8	45	200