

## 30.1 GENERAL INFORMATION

| PERFORMANCE RELATED |  |  |  |  | MATERIAL |  | INSTALLATION RELATED |  |  |  |  |  |  |  |
|---------------------|--|--|--|--|----------|--|----------------------|--|--|--|--|--|--|--|
|                     |  |  |  |  |          |  |                      |  |  |  |  |  |  |  |

### Product

The WERCS AnkaScrew™ Anchor is a medium duty, rotation setting thread forming anchor.

### Benefits, Advantages and Features

#### Fast and easy to install:


- Simply screws into hole.

#### Fast and easy to remove:

- Screws out leaving an empty hole with no protruding metal parts to grind off.

#### Close to edge and for close anchor spacing:


- Does not expand and burst concrete.

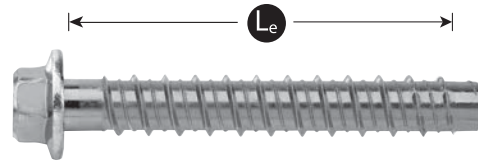

### Principal Applications

- Pallet racking
- Temporary safety barriers
- Conveyors
- Pipe brackets
- Gate hinges into brickwork
- Temporary hand rails
- Bottom plates

### Installation

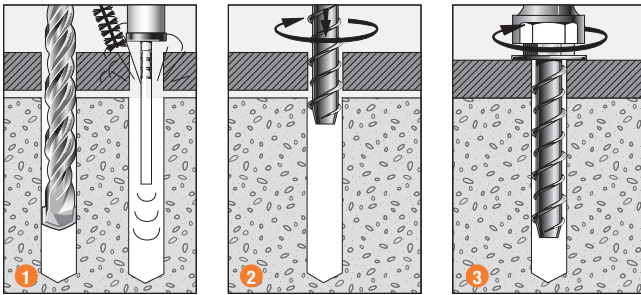

1. Drill hole to correct diameter and depth. Clean thoroughly with brush. Remove debris by way of vacuum or hand pump, compressed air etc.
2. Using a socket wrench, screw the WERCS AnkaScrew™ into the hole using slight pressure until the self tapping action starts.
3. Tighten the WERCS AnkaScrew™ until flush with fixture. If resistance is experienced when tightening, unscrew anchor one turn and re-tighten. Ensure not to over tighten.

### Installation and performance details

Mechanical Anchoring

| Anchor size, d <sub>b</sub> (mm) | Installation details                       |  |                                |                            | Optimum dimensions*                |                                     | Reduced Characteristics Capacity   |  |      |      |
|----------------------------------|--|--|--------------------------------|----------------------------|------------------------------------|-------------------------------------|--|--|------|------|
|                                  | Drilled hole diameter, d <sub>h</sub> (mm) | Fixture hole diameter, d <sub>f</sub> (mm) | Anchor effective depth, h (mm) | Tightening torque, T, (Nm) | Edge distance, e <sub>c</sub> (mm) | Anchor spacing, a <sub>c</sub> (mm) | Shear (concrete)<br>ØV <sub>uc</sub> (kN)***<br>f' <sub>c</sub> > 20 MPa | Tension (concrete), ØN <sub>uc</sub> (kN)**    |      |      |
|                                  |  |  |                                |                            |                                    |                                     |  | Concrete compressive strength, f' <sub>c</sub> |      |      |
| 20 MPa                           | 25 MPa                                     | 32 MPa                                     |                                |                            |                                    |                                     |  |  |      |      |
| 5                                | 5  | 7  | 25                             | 5                          | 15                                 | 15                                  | 0.9  | 2.1  | 2.3  | 2.5  |
| 6                                | 6  | 8  | 30                             | 15                         | 60                                 | 35                                  | 6.8 #  | 3.7  | 4.0  | 4.3  |
|                                  |  |  | 37                             |                            |                                    |                                     | 7.5  | 4.7  | 5.0  | 5.5  |
|                                  |  |  | 45                             |                            |                                    |                                     | 7.5  | 5.8  | 6.3  | 6.9  |
| 8                                | 8  | 10   | 40                             | 40                         | 80                                 | 45                                  | 12.6 #   | 5.5  | 5.9  | 6.4  |
|                                  |  |  | 50                             |                            |                                    |                                     | 13.3   | 7.3  | 7.9  | 8.6  |
|                                  |  |  | 60                             |                            |                                    |                                     | 13.3   | 9.3  | 10.0 | 10.9 |
| 10                               | 10   | 12   | 50                             | 55                         | 100                                | 60                                  | 20.7   | 7.9  | 8.5  | 9.3  |
|                                  |  |  | 62                             |                            |                                    |                                     | 20.7   | 10.6   | 11.5 | 12.5 |
|                                  |  |  | 75                             |                            |                                    |                                     | 20.7   | 13.9   | 15.0 | 16.3 |
| 12                               | 12   | 15   | 60                             | 80                         | 120                                | 70                                  | 25 #   | 11.2   | 12.1 | 13.2 |
|                                  |  |  | 75                             |                            |                                    |                                     | 28.4 #   | 15.5   | 16.8 | 18.3 |
|                                  |  |  | 90                             |                            |                                    |                                     | 29.8   | 20.3   | 21.9 | 23.9 |
| 16                               | 16   | 19   | 90                             | -                          | 160                                | 100                                 | 53.0   | 20.7   | 24.1 | 28.4 |
|                                  |  |  | 105                            |                            |                                    |                                     | 53.0   | 25.4   | 29.5 | 34.8 |
|                                  |  |  | 120                            |                            |                                    |                                     | 53.0   | 30.3   | 35.2 | 41.5 |

\* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

\*\*Note: Reduced characteristic ultimate concrete tensile capacity = ØN<sub>uc</sub> where Ø = 0.60 and N<sub>uc</sub> = Characteristic ultimate concrete tensile capacity.

**For conversion to Working Load Limit MULTIPLY ØN<sub>uc</sub> x 0.55**

\*\*\* Note: Values are for shear load direction away from concrete edge - Reduce characteristic ultimate concrete edge shear capacity = ØV<sub>uc</sub> where Ø = 0.6 and V<sub>uc</sub> = Characteristic ultimate concrete edge shear capacity.

# Note: Values for shear limited by steel - Reduced characteristic ultimate steel shear capacity = ØV<sub>us</sub> where Ø = 0.80 and V<sub>us</sub> = Characteristic ultimate steel shear capacity.

## 30.2 DESCRIPTION AND PART NUMBERS

| Anchor size, d <sub>b</sub> | Effective length, L <sub>e</sub> (mm) | Part No.    |               |
|-----------------------------|---------------------------------------|-------------|---------------|
|                             |                                       | Zn Hex Head | Gal Hex Head  |
| 5                           | 28                                    | AS05030     | -             |
| 6                           | 44                                    | AS06050W100 | AS06050WGM100 |
|                             | 69                                    | AS06075W100 | AS06075WGM100 |
|                             | 94                                    | AS06100W100 | AS06100WGM100 |
| 8                           | 54                                    | AS08060W100 | AS08060WGM100 |
|                             | 69                                    | AS08075W100 | AS08075WGM100 |
|                             | 94                                    | AS08100W100 | AS08100WGM100 |
| 10                          | 54                                    | AS10060W50  | AS10060WGM50  |
|                             | 69                                    | AS10075W50  | AS10075WGM50  |
|                             | 94                                    | AS10100W50  | AS10100WGM50  |
| 12                          | 69                                    | AS12075W50  | AS12075WGM50  |
|                             | 94                                    | AS12100W50  | AS12100WGM50  |
|                             | 144                                   | AS12150W20  | AS12150WGM20  |
| 16                          | 115                                   | AS16115     | -             |
|                             | 140                                   | AS16140     | -             |
|                             | 160                                   | AS16160     | -             |

Effective depth, h (mm)

$$h = L_e - t,$$

t = total thickness of material(s) being fixed

Substrate thickness, b<sub>m</sub> (mm)

$$b_m = \text{greater of: } 1.25 \times h, \\ h + (3 \times d_h)$$

Drilled hole depth, h<sub>1</sub> (mm)

$$h_1 = h + d_h \\ h = \text{Effective depth}$$

## 30.3 ENGINEERING PROPERTIES

| Anchor size, d <sub>b</sub> (mm) | Stress area, A <sub>s</sub> (mm <sup>2</sup> ) | Yield strength, f <sub>y</sub> (MPa) | UTS, f <sub>u</sub> (MPa) |
|----------------------------------|--|--------------------------------------|---------------------------|
| 5                                | 15.9   | 600                                  | 800                       |
| 6                                | 22.9   | 640                                  | 800                       |
| 8                                | 42.4   | 640                                  | 800                       |
| 10                               | 69.4   | 640                                  | 800                       |
| 12                               | 84.1   | 640                                  | 800                       |
| 16                               | 186.3  | 640                                  | 800                       |

**STEP 1** Select anchor to be evaluated

Table 1a Indicative combined loading – interaction diagram

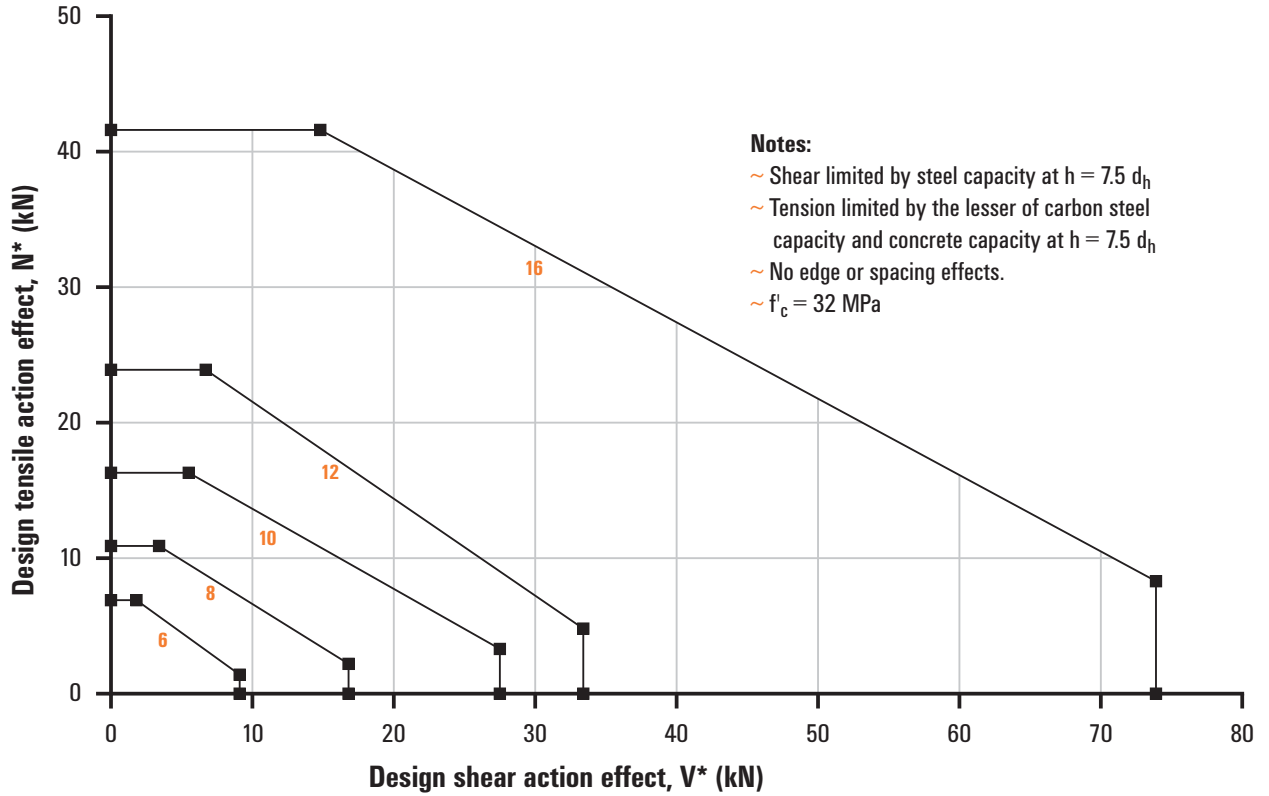


Table 1b Absolute minimum edge distance and anchor spacing values,  $e_m$  and  $a_m$  (mm)

| Anchor Size, $d_b$ (mm) | 6  | 8  | 10 | 12 | 16 |
|-------------------------|----|----|----|----|----|
| $e_m, a_m$              | 20 | 25 | 30 | 35 | 50 |

**Step 1c Calculate anchor effective depth,  $h$  (mm)**

Refer to "Description and Part Numbers" table on page 212.

Effective depth,  $h$  (mm)

$h = L_e - t,$

$t = \text{total thickness of material(s) being fixed}$

**Checkpoint 1** Anchor size determined, absolute minima compliance achieved, effective depth ( $h$ ) calculated.

**STEP 2** Verify concrete tensile capacity - per anchor


Table 2a Reduced characteristic ultimate concrete tensile capacity,  $\phi N_{uc}$  (kN),  $\phi_c = 0.6$ ,  $f'_c = 32$  MPa

| Anchor Size, $d_b$           | 6   | 8    | 10   | 12   | 16   |
|------------------------------|-----|------|------|------|------|
| Drilled Hole Dia, $d_h$ (mm) | 6   | 8    | 10   | 12   | 16   |
| Effective Depth, $h$ (mm)    |     |      |      |      |      |
| 30                           | 4.3 |      |      |      |      |
| 35                           | 5.1 |      |      |      |      |
| 40                           | 6.0 | 6.4  |      |      |      |
| 45                           | 6.9 | 7.5  |      |      |      |
| 50                           |     | 8.6  | 9.3  |      |      |
| 55                           |     | 9.8  | 10.6 |      |      |
| 60                           |     | 10.9 | 12.0 | 13.2 |      |
| 75                           |     |      | 16.3 | 18.3 | 22.3 |
| 90                           |     |      |      | 23.9 | 28.4 |
| 105                          |     |      |      |      | 34.8 |
| 120                          |     |      |      |      | 41.6 |

Table 2b Concrete compressive strength effect, tension,  $X_{nc}$

| $f'_c$ (MPa)                           | 20   | 25   | 32 | 40   |
|--|------|------|----|------|
| $X_{nc}$ - Anchor size $d_b = 6-12$    | 0.85 | 0.92 | 1  | 1.08 |
| $X_{nc}$ - Anchor size $d_b = 16$ only | 0.73 | 0.85 | 1  | 1.16 |


Table 2c Edge distance effect, tension,  $X_{ne}$



| Anchor Size, $d_b$       | 6    | 8    | 10   | 12   | 16   |
|--------------------------|------|------|------|------|------|
| Edge Distance $e$ , (mm) |      |      |      |      |      |
| 20                       | 0.53 |      |      |      |      |
| 25                       | 0.59 | 0.52 |      |      |      |
| 30                       | 0.65 | 0.56 | 0.51 |      |      |
| 35                       | 0.71 | 0.61 | 0.55 | 0.50 |      |
| 40                       | 0.77 | 0.65 | 0.58 | 0.53 |      |
| 50                       | 0.88 | 0.74 | 0.65 | 0.59 | 0.51 |
| 60                       | 1.00 | 0.83 | 0.72 | 0.65 | 0.55 |
| 70                       |      | 0.91 | 0.79 | 0.71 | 0.60 |
| 80                       |      | 1.00 | 0.86 | 0.77 | 0.64 |
| 90                       |      |      | 0.93 | 0.83 | 0.69 |
| 100                      |      |      | 1.00 | 0.88 | 0.73 |
| 110                      |      |      |      | 0.94 | 0.78 |
| 120                      |      |      |      | 1.00 | 0.82 |
| 145                      |      |      |      |      | 0.93 |
| 160                      |      |      |      |      | 1.00 |

Table 2d Anchor spacing effect, end of a row, tension,  $X_{nae}$


Note: For single anchor designs,  $X_{nae} = 1.0$



| Anchor Size, $d_b$        | 6    | 8    | 10   | 12   | 16   |
|---------------------------|------|------|------|------|------|
| Anchor Spacing $a$ , (mm) |      |      |      |      |      |
| 20                        | 0.78 |      |      |      |      |
| 25                        | 0.85 | 0.76 |      |      |      |
| 30                        | 0.92 | 0.81 | 0.75 |      |      |
| 35                        | 1.00 | 0.86 | 0.79 | 0.78 |      |
| 40                        |      | 0.92 | 0.83 | 0.81 |      |
| 45                        |      | 1.00 | 0.88 | 0.81 |      |
| 50                        |      |      | 0.92 | 0.85 | 0.76 |
| 55                        |      |      | 0.96 | 0.88 | 0.79 |
| 60                        |      |      | 1.00 | 0.92 | 0.81 |
| 70                        |      |      |      | 1.00 | 0.86 |
| 80                        |      |      |      |      | 0.92 |
| 90                        |      |      |      |      | 0.97 |
| 100                       |      |      |      |      | 1.00 |

Table 2e Anchor spacing effect, internal to a row, tension,  $X_{nai}$

Note: For single anchor designs,  $X_{nai} = 1.0$



| Anchor Size, $d_b$        | 6    | 8    | 10   | 12   | 16   |
|---------------------------|------|------|------|------|------|
| Anchor Spacing $a$ , (mm) |      |      |      |      |      |
| 20                        | 0.56 |      |      |      |      |
| 25                        | 0.69 | 0.52 |      |      |      |
| 30                        | 0.83 | 0.63 | 0.50 |      |      |
| 35                        | 1.00 | 0.73 | 0.58 | 0.49 |      |
| 40                        |      | 0.83 | 0.67 | 0.56 |      |
| 45                        |      | 0.94 | 0.75 | 0.63 |      |
| 50                        |      | 1.00 | 0.83 | 0.69 | 0.52 |
| 55                        |      |      | 0.92 | 0.76 | 0.57 |
| 60                        |      |      | 1.00 | 0.83 | 0.63 |
| 70                        |      |      |      | 1.00 | 0.73 |
| 80                        |      |      |      |      | 0.83 |
| 90                        |      |      |      |      | 0.94 |
| 100                       |      |      |      |      | 1.00 |

**Checkpoint 2**

Design reduced ultimate concrete tensile capacity,  $\phi N_{urc}$

$$\phi N_{urc} = \phi N_{uc} * X_{nc} * X_{ne} * (X_{nae} \text{ or } X_{nai})$$

**STEP 3**

Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity,  $\phi N_{us}$  (kN),  $\phi_n = 0.8$

| Anchor size, $d_b$ (mm)   | 6    | 8    | 10   | 12   | 16    |
|---------------------------|------|------|------|------|-------|
| Heat Treated Carbon Steel | 14.6 | 27.1 | 44.4 | 53.8 | 119.2 |

Step 3b Reduced characteristic ultimate bolt steel tensile capacity,  $\phi N_{tr}$  (kN)

Not appropriate for this product.

**Checkpoint 3**

Design reduced ultimate tensile capacity,  $\phi N_{ur}$

$$\phi N_{ur} = \text{minimum of } \phi N_{urc}, \phi N_{us}$$

$$\text{Check } N^* / \phi N_{ur} \leq 1,$$

if not satisfied return to step 1

Tensile performance conversion table

| Performance Required          | Concrete Tensile Performance |                                     | Steel Tensile Performance |                                    |
|-------------------------------|------------------------------|-------------------------------------|---------------------------|------------------------------------|
|                               | Notation                     | Concrete Tension Capacity           | Notation                  | Carbon Steel Tension Capacity      |
| Strength Limit State          | $\phi N_{urc}$               | MULTIPLY $\phi N_{urc} \times 1.00$ | $\phi N_{us}$             | MULTIPLY $\phi N_{us} \times 1.00$ |
| Working Load Limit            | $N_{ac}$                     | MULTIPLY $\phi N_{urc} \times 0.55$ | $N_{as}$                  | MULTIPLY $\phi N_{us} \times 0.56$ |
| Cyclic Loading                | $N_{yc}$                     | MULTIPLY $\phi N_{urc} \times 0.55$ | $N_{ys}$                  | MULTIPLY $\phi N_{us} \times 0.56$ |
| Fire Resistance               | $N_{Rk,c,fi,t}$              | Refer to pages 238-257              | $N_{Rk,s,fi,t}$           | Refer to pages 238-257             |
| Cracked Concrete/Tension Zone | $N_{Rd,p}^0$                 | Refer to pages 258-298              | $N_{Rd,s}$                | Refer to pages 258-298             |
| Seismic                       | $N_{Rd,p,sis}^0$             | Refer to pages 299-325              | $N_{Rd,s,sis}$            | Refer to pages 299-325             |

NOTE: Design Tensile Capacity is the minimum of Concrete Tension and Steel Tension Capacities

**STEP 4** Verify concrete shear capacity - per anchor


**Table 4a Reduced characteristic ultimate concrete edge shear capacity,  $\phi V_{uc}$  (kN),  $\phi_q = 0.6$ ,  $f'_c = 32$  MPa**

| Anchor Size, $d_b$           | 6    | 8    | 10   | 12    | 16    |
|------------------------------|------|------|------|-------|-------|
| <b>Edge Distance e, (mm)</b> |      |      |      |       |       |
| 20                           | 0.9  |      |      |       |       |
| 25                           | 1.3  | 1.5  |      |       |       |
| 30                           | 1.7  | 1.9  | 2.2  |       |       |
| 35                           | 2.1  | 2.4  | 2.7  | 3.0   |       |
| 50                           | 3.6  | 4.1  | 4.6  | 5.1   | 5.9   |
| 75                           | 6.6  | 7.6  | 8.5  | 9.3   | 10.8  |
| 100                          | 10.1 | 11.7 | 13.1 | 14.3  | 16.6  |
| 150                          | 18.6 | 21.5 | 24.1 | 26.4  | 30.4  |
| 200                          | 28.7 | 33.1 | 37.0 | 40.6  | 46.8  |
| 250                          |      | 46.3 | 51.8 | 56.7  | 65.5  |
| 300                          |      |      | 68.0 | 74.5  | 86.1  |
| 400                          |      |      |      | 114.8 | 132.5 |
| 500                          |      |      |      |       | 185.2 |

**Note:** Effective depth, h must be  $\geq 3.5 \times$  Anchor size,  $d_n$  for anchor to achieve tabled shear capacities.

**Table 4b Concrete compressive strength effect, concrete edge shear,  $X_{vc}$**

| $f'_c$ (MPa) | 20   | 25   | 32   | 40   |
|--------------|------|------|------|------|
| $X_{vc}$     | 0.79 | 0.88 | 1.00 | 1.12 |



Load direction effect, conc. edge shear,  $X_{vd}$

**Table 4c Load direction effect, concrete edge shear,  $X_{vd}$**

| Angle, $\alpha^\circ$ | 0    | 10   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90 - 180 |
|-----------------------|------|------|------|------|------|------|------|------|------|----------|
| $X_{vd}$              | 1.00 | 1.04 | 1.16 | 1.32 | 1.50 | 1.66 | 1.80 | 1.91 | 1.98 | 2.00     |

**Table 4d Anchor spacing effect, concrete edge shear,  $X_{va}$**

**Note:** For single anchor designs,  $X_{va} = 1.0$

| Edge distance, e (mm)         | 20   | 25   | 30   | 35   | 50   | 75   | 100  | 150  | 200  | 250  | 300  | 400  | 500  |
|-------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>Anchor spacing, a (mm)</b> |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 20                            | 0.70 | 0.66 | 0.63 | 0.61 | 0.58 | 0.55 | 0.54 | 0.53 | 0.52 |      |      |      |      |
| 25                            | 0.75 | 0.70 | 0.67 | 0.64 | 0.60 | 0.57 | 0.55 | 0.53 | 0.53 | 0.52 |      |      |      |
| 30                            | 0.80 | 0.74 | 0.70 | 0.67 | 0.62 | 0.58 | 0.56 | 0.54 | 0.53 | 0.52 | 0.52 |      |      |
| 35                            | 0.85 | 0.78 | 0.73 | 0.70 | 0.64 | 0.59 | 0.57 | 0.55 | 0.54 | 0.53 | 0.52 | 0.52 |      |
| 40                            | 0.90 | 0.82 | 0.77 | 0.73 | 0.66 | 0.61 | 0.58 | 0.55 | 0.54 | 0.53 | 0.53 | 0.52 | 0.52 |
| 50                            | 1.00 | 0.90 | 0.83 | 0.79 | 0.70 | 0.63 | 0.60 | 0.57 | 0.55 | 0.54 | 0.53 | 0.53 | 0.52 |
| 65                            |      | 1.00 | 0.93 | 0.87 | 0.76 | 0.67 | 0.63 | 0.59 | 0.57 | 0.55 | 0.54 | 0.53 | 0.53 |
| 80                            |      |      | 1.00 | 0.96 | 0.82 | 0.71 | 0.66 | 0.61 | 0.58 | 0.56 | 0.55 | 0.54 | 0.53 |
| 100                           |      |      |      | 1.00 | 0.90 | 0.77 | 0.70 | 0.63 | 0.60 | 0.58 | 0.57 | 0.55 | 0.54 |
| 125                           |      |      |      |      | 1.00 | 0.83 | 0.75 | 0.67 | 0.63 | 0.60 | 0.58 | 0.56 | 0.55 |
| 150                           |      |      |      |      |      | 0.90 | 0.80 | 0.70 | 0.65 | 0.62 | 0.60 | 0.58 | 0.56 |
| 200                           |      |      |      |      |      | 1.00 | 0.90 | 0.77 | 0.70 | 0.66 | 0.63 | 0.60 | 0.58 |
| 250                           |      |      |      |      |      |      | 1.00 | 0.83 | 0.75 | 0.70 | 0.67 | 0.63 | 0.60 |
| 300                           |      |      |      |      |      |      |      | 0.90 | 0.80 | 0.74 | 0.70 | 0.65 | 0.62 |
| 450                           |      |      |      |      |      |      |      | 1.00 | 0.95 | 0.86 | 0.80 | 0.73 | 0.68 |
| 600                           |      |      |      |      |      |      |      |      | 1.00 | 0.98 | 0.90 | 0.80 | 0.74 |
| 1000                          |      |      |      |      |      |      |      |      |      | 1.00 | 1.00 | 1.00 | 0.90 |
| 1250                          |      |      |      |      |      |      |      |      |      |      |      |      | 1.00 |


**Table 4e Multiple anchors effect, concrete edge shear,  $X_{vn}$**

Note: For single anchor designs,  $X_{vn} = 1.0$

| Anchor spacing / Edge distance, a / e | 0.20 | 0.40 | 0.60 | 0.80 | 1.00 | 1.20 | 1.40 | 1.60 | 1.80 | 2.00 | 2.25 | 2.50 |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Number of anchors, n                  |      |      |      |      |      |      |      |      |      |      |      |      |
| 2                                     | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 3                                     | 0.72 | 0.76 | 0.80 | 0.83 | 0.86 | 0.88 | 0.91 | 0.93 | 0.95 | 0.96 | 0.98 | 1.00 |
| 4                                     | 0.57 | 0.64 | 0.69 | 0.74 | 0.79 | 0.82 | 0.86 | 0.89 | 0.92 | 0.94 | 0.97 | 1.00 |
| 5                                     | 0.49 | 0.57 | 0.63 | 0.69 | 0.74 | 0.79 | 0.83 | 0.87 | 0.90 | 0.93 | 0.97 | 1.00 |
| 6                                     | 0.43 | 0.52 | 0.59 | 0.66 | 0.71 | 0.77 | 0.81 | 0.85 | 0.89 | 0.93 | 0.96 | 1.00 |
| 7                                     | 0.39 | 0.48 | 0.56 | 0.63 | 0.69 | 0.75 | 0.80 | 0.84 | 0.88 | 0.92 | 0.96 | 1.00 |
| 8                                     | 0.36 | 0.46 | 0.54 | 0.61 | 0.68 | 0.74 | 0.79 | 0.84 | 0.88 | 0.92 | 0.96 | 1.00 |
| 9                                     | 0.34 | 0.44 | 0.52 | 0.60 | 0.67 | 0.73 | 0.78 | 0.83 | 0.87 | 0.91 | 0.96 | 1.00 |
| 10                                    | 0.32 | 0.42 | 0.51 | 0.59 | 0.66 | 0.72 | 0.77 | 0.82 | 0.87 | 0.91 | 0.96 | 1.00 |
| 15                                    | 0.26 | 0.37 | 0.47 | 0.55 | 0.63 | 0.70 | 0.76 | 0.81 | 0.86 | 0.90 | 0.95 | 1.00 |
| 20                                    | 0.23 | 0.35 | 0.45 | 0.54 | 0.61 | 0.68 | 0.75 | 0.80 | 0.85 | 0.90 | 0.95 | 1.00 |

**Table 4f Anchor at a corner effect, concrete edge shear,  $X_{vs}$**

Note: For  $e_1/e_2 > 1.25$ ,  $X_{vs} = 1.0$



| Edge distance, $e_2$ (mm) | 25   | 30   | 35   | 50   | 60   | 75   | 125  | 200  | 300  | 400  | 600  | 900  |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Edge distance, $e_1$ (mm) |      |      |      |      |      |      |      |      |      |      |      |      |
| 25                        | 0.86 | 0.77 | 0.70 | 0.58 | 0.53 | 0.49 | 0.41 | 0.37 | 0.35 | 0.34 | 0.32 | 0.32 |
| 30                        | 0.97 | 0.86 | 0.78 | 0.64 | 0.58 | 0.52 | 0.43 | 0.38 | 0.36 | 0.34 | 0.33 | 0.32 |
| 35                        | 1.00 | 0.95 | 0.86 | 0.69 | 0.63 | 0.56 | 0.46 | 0.40 | 0.37 | 0.35 | 0.33 | 0.32 |
| 50                        | 1.00 | 1.00 | 1.00 | 0.86 | 0.77 | 0.67 | 0.52 | 0.44 | 0.39 | 0.37 | 0.35 | 0.33 |
| 60                        | 1.00 | 1.00 | 1.00 | 0.97 | 0.86 | 0.75 | 0.57 | 0.47 | 0.41 | 0.38 | 0.36 | 0.34 |
| 75                        | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.64 | 0.51 | 0.44 | 0.41 | 0.37 | 0.35 |
| 125                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.65 | 0.53 | 0.48 | 0.42 | 0.38 |
| 200                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.58 | 0.49 | 0.42 |
| 300                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.72 | 0.58 | 0.49 |
| 400                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.55 |
| 500                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.77 | 0.61 |
| 600                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 |
| 900                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 |

**Checkpoint 4**

Design reduced ultimate concrete edge shear capacity,  $\phi V_{urc}$

$$\phi V_{urc} = \phi V_{uc} * X_{vc} * X_{vd} * X_{va} * X_{vn} * X_{vs}$$

**STEP 5**

Verify anchor shear capacity - per anchor

**Table 5a Reduced characteristic ultimate steel shear capacity,  $\phi V_{us}$  (kN),  $\phi_v = 0.8$**

| Anchor size, $d_b$ (mm) | 6   | 8    | 10   | 12   | 16   |
|-------------------------|-----|------|------|------|------|
| $h \geq 5 \times d_h$   | 6.8 | 12.6 | 20.7 | 25.0 | 55.4 |
| $h \geq 6 \times d_h$   | 7.7 | 14.3 | 23.4 | 28.4 | 62.8 |
| $h \geq 7 \times d_h$   | 8.6 | 16.0 | 26.2 | 31.7 | 70.2 |
| $h \geq 7.5 \times d_h$ | 9.1 | 16.8 | 27.5 | 33.4 | 73.9 |

**Step 5b Reduced characteristic ultimate bolt steel shear capacity,  $\phi V_{sf}$  (kN)**

Not appropriate for this product.

**Checkpoint 5**

Design reduced ultimate shear capacity,  $\phi V_{ur}$

$\phi V_{ur}$  = minimum of  $\phi V_{urc}$ ,  $\phi V_{us}$

Check  $V^* / \phi V_{ur} \leq 1$ ,

if not satisfied return to step 1

**Shear performance conversion table**

| Performance Required          | Concrete Shear Performance |                               | Steel Shear Performance |                               |
|-------------------------------|----------------------------|-------------------------------|-------------------------|-------------------------------|
|                               | Notation                   | Concrete Shear Capacity       | Notation                | Carbon Steel Shear Capacity   |
| Strength Limit State          | $\phi V_{uc}$              | MULTIPLY $\phi V_{uc}$ x 1.00 | $\phi V_{us}$           | MULTIPLY $\phi V_{us}$ x 1.00 |
| Working Load Limit            | $V_{ac}$                   | MULTIPLY $\phi V_{uc}$ x 0.55 | $V_{as}$                | MULTIPLY $\phi V_{us}$ x 0.50 |
| Cyclic Loading                | $V_{yc}$                   | MULTIPLY $\phi V_{uc}$ x 0.55 | $V_{ys}$                | MULTIPLY $\phi V_{us}$ x 0.50 |
| Fire Resistance               | $V_{Rk,c,fi,t}$            | Refer to pages 238-257        | $V_{Rk,s,fi,t}$         | Refer to pages 238-257        |
| Cracked Concrete/Tension Zone | $V_{Rd,c}^0$               | Refer to pages 258-298        | $V_{Rd,s}^0$            | Refer to pages 258-298        |
| Seismic                       | $V_{Rd,c,sis}^0$           | Refer to pages 299-325        | $V_{Rd,s,sis}^0$        | Refer to pages 299-325        |

NOTE: Design Shear Capacity is the minimum of Concrete Shear and Steel Shear Capacities

**STEP 6 Combined loading and specification**

**Checkpoint 6**

Check

$$N^* / \phi N_{ur} + V^* / \phi V_{ur} \leq 1.2,$$

if not satisfied return to step 1

**Specify**

Ramset™ WERCS AnkaScrew™ Anchor,  
(Anchor Size) ((Part Number)).  
Maximum fixed thickness to be (t) mm.

**Example**

Ramset™ WERCS AnkaScrew™ Anchor,  
12 mm (AS12100W50).  
Maximum fixed thickness to be 40 mm.  
To be installed in accordance with  
Ramset™ Technical Data Sheet.