


Hollow Wall

Anchors

Plasterboard & Cavity Anchors

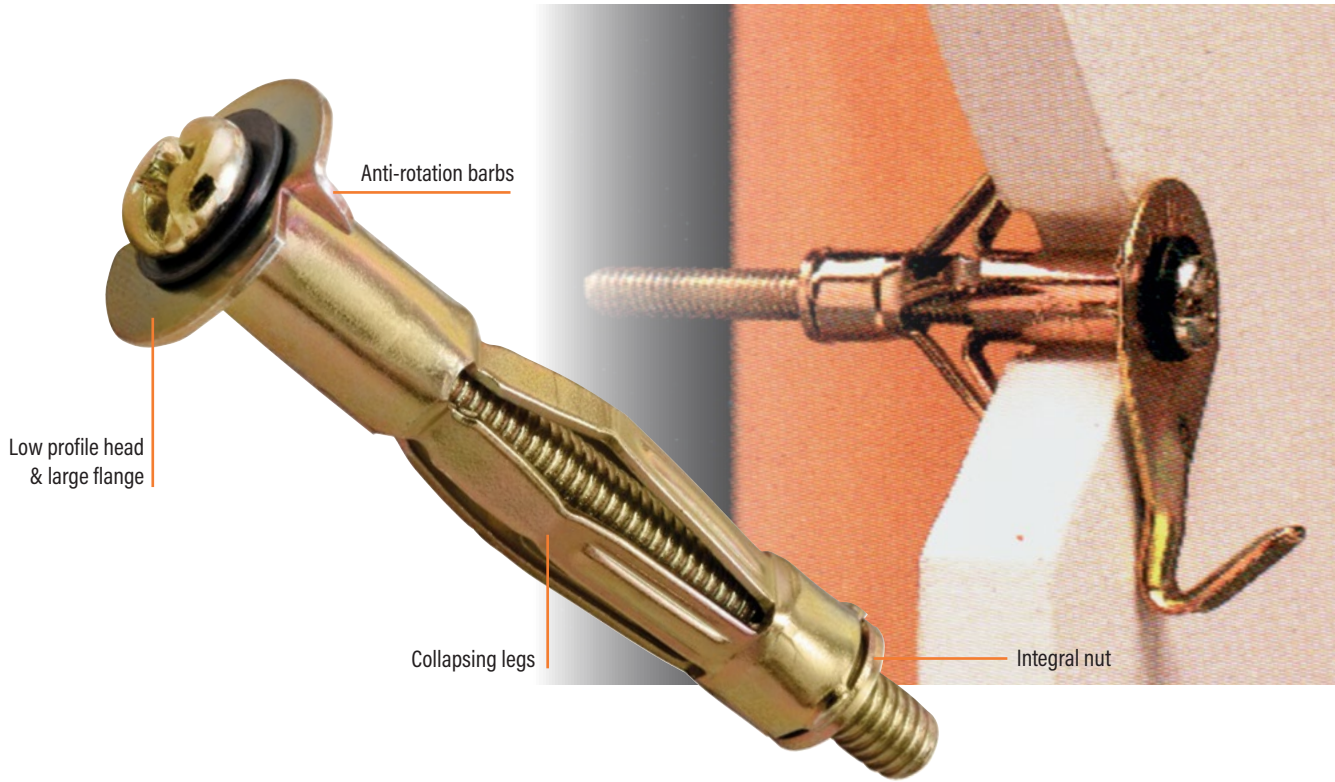

Anti-rotation barbs

Low profile head & large flange

Collapsing legs

Integral nut

Description

The Ramset™ Hollow Wall Anchor is an all metal, light duty, cavity fixing for plasterboard and other hollow wall materials up to 24mm.

Specification

Material	Pressed Steel Body, Carbon Steel Screw
Corrosion Protection	Zinc Plating
Head Style	Slotted Philips Button Head
Fixing Method	Fixture Aligned
Setting Method	Setting Tool/Rotation
Anchoring Method	Deformation
Thread Diameters	M4, M5, M6
Drilled Hole Diameters	8mm, 9mm, 13mm
Wall Thickness'	0mm-5mm, 6mm-10mm, 6mm-16mm, 8mm-13mm, 16mm-24mm
Maximum Fixture Thickness'	10mm, 15mm, 17mm, 20mm, 22mm
Substrates	Plasterboard, Ply Wood, Cement Sheet

Features & Benefits

- The Hollow Wall Anchor's low profile head allows for flush finishing.
- The anchor's large flange prevents the head from pulling into the substrate.
- Anti-rotation barbs, incorporated in the flange, prevent the anchor from spinning in the hole.
- Collapsing legs with an integral nut provide high strength and allow the screw to be removed without losing the anchor inside the cavity.

Related Products

- Drill
- Drill Bits
- Drill Driver
- Screw Gun
- Screwdriver Bits
- Hollow Wall Anchor Setting Tool

Hollow Wall


Anchors

Trades & Applications

	Miscellaneous Trades	Plumbing Contractor	Electrical Contractor
Light Hook/Bracket Installation	✓		
Electrical Fitting Installation			✓
Pipe/Conduit Saddle Installation		✓	✓

Installation

1. Drill a hole to the recommended diameter.
2. Tap the anchor into the hole until it is flush with the surface of the substrate.
3. Attach the setting tool to the head of the screw. Squeeze the trigger to expand the anchor. (Small sizes may be set using a screwdriver)
4. Remove the screw and place it through the fixture then back into the anchor. Tighten the screw until the fixture is fixed.

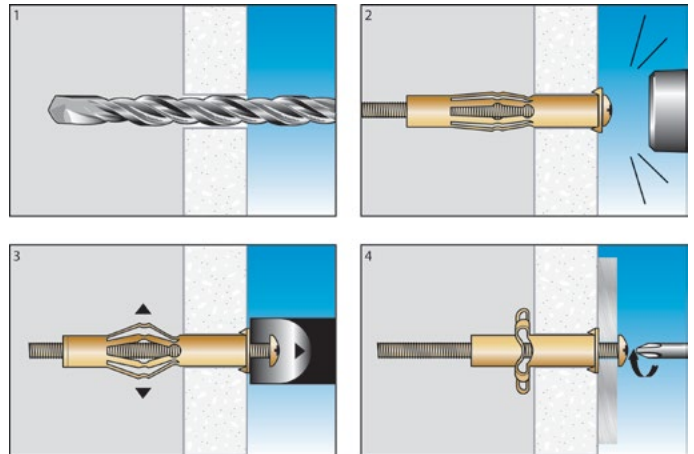

Plasterboard & Cavity Anchors



Hollow Wall Anchor

Part No	Thread Size	Wall Thickness (mm)	Max Fixture Thickness (mm)	Drilled Hole Ø (mm)	Order Qty
HW05M4	M4	0 - 5	10	8	100
HW10M4	M4	6 - 10	15	8	100
HW13M4	M4	8 - 13	15	8	100
HW24M4	M4	16 - 24	17	8	100
HW14M5	M5	8 - 13	20	9	100
HW16M6	M6	6 - 16	22	13	100

Hollow Wall Anchor - Setting Tool

Part No	Description	Order Qty
SETHWG	Setting Tool	1

